



WELL-X-TROL®

Full Acceptance Bladder Well Tanks: WX-440 and WX-450 Series Non-ASME

150 PSIG Working Pressure

Construction


Shell	Steel
Full Acceptance Bladder	Heavy Duty Butyl
Bladder Thickness	.100 In. Minimum
System Connection	Malleable Iron (NPTF)
Finish	Red Oxide Primer
Air Valve	Schrader Valve w/EPDM Seats
Factory Precharge	25 PSIG (1.7 bar)

Performance

Maximum Operating Temperature	240°F (115°C)
Maximum Working Pressure	150 PSIG (10.3 bar)
Warranty	1-Year

Application

- For use in commercial well water and booster pump systems.
- Replaceable bladder design.
- Sight glass and seismic restraint options available.
- Available with S/S system connection.

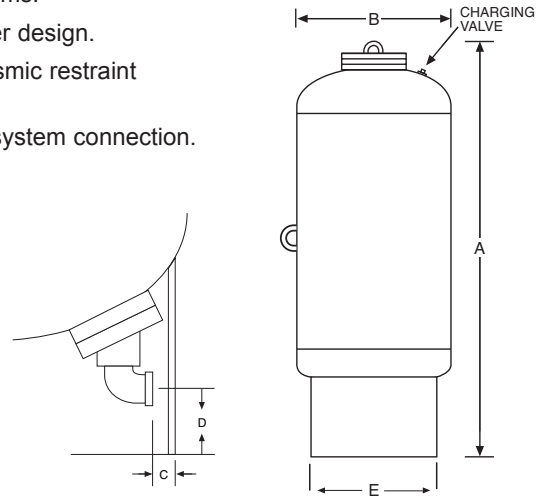

Non-ASME Models

Model Number	Tank Volume		Max. Accept. Volume		A Tank Height		B Tank Diameter		C Sys. Conn. Inset		D Sys. Conn. Centerline		E Stand Diameter		System Conn. (NPTF)	Shipping Weight	
	Gal	Lit	Gal	Lit	In	mm	In	mm	In	mm	In	mm	In	mm		Lbs	Kg
WX-447	53	200	53	200	45	1143	24	610	2	51	3¾	95	19	483	2	289	131
WX-448	80	300	80	300	59	1498	24	610	2	51	3¾	95	19	483	2	338	153
WX-449	106	400	106	400	73	1854	24	610	2	51	3¾	95	19	483	2	350	159
WX-450	132	500	132	500	87	2210	24	610	2	51	3¾	95	19	483	2	392	178
WX-451	158	600	158	600	73	1854	30	762	3½	89	5½	140	24	610	2	587	266
WX-452	211	800	211	800	91	2311	30	762	3½	89	5½	140	24	610	2	627	284
WX-453	264	1000	264	1000	86	2184	36	914	3¾	98	6¾	171	30	762	3	752	341
WX-454	317	1200	317	1200	98	2489	36	914	3¾	98	6¾	171	30	762	3	840	381
WX-455	370	1400	370	1400	110	2794	36	914	3¾	98	6¾	171	30	762	3	930	422
WX-456	422	1600	422	1600	82	2083	48	1219	7½	191	7¾	181	42	1067	3	1418	643
WX-457	528	2000	528	2000	97	2464	48	1219	7½	191	7¾	181	42	1067	3	1500	680

All dimensions and weights are approximate.

Job Name _____	Notes _____
Engineer _____	_____
Contractor _____	_____
P.O. No. _____	_____
Sales Rep. _____	_____
Model No. _____	_____

